

ETL 2-HOLE CABLE LUG

Application


- Suitable for **power cable terminations** in telecom, industrial, and electrical distribution systems
- Recommended for use in **brownfield projects** where reliability and retrofit compatibility are critical



Conductor entry: 6 mm diameter

Mounting holes: $2 \times \varnothing$ [Size, e.g., 6.8 mm]

Center-to-center spacing: [specify, 20 mm]

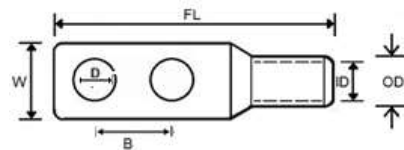

Size (mm ²)	Stud hole	Item code	B	D	W	OD	ID	FL
6	M6	CLTH-16-7	19	6.8	9.9	6.0	4.0	51
16	M8	CLTH-16-8	45	8	12.0	7.8	5.6	88
25	M8	CLTH-25-8	45	11	13.5	9.3	7.0	98
35	M10	CLTH-35-10	45	11	16.0	10.8	8.4	103
50	M10	CLTH-50-10	45	12	18.0	12.5	9.5	105

Notes:

1. All dimensions are in mm.
2. Other dimension customizations are available upon request.
3. Please consult with our sales personnel before order.

Industrial standard / [product link](#)

