



Description

ETL-FOSC-48c-H Heat shrink Seal closure type of FOSC supports cable connection and branch. It is applicable to many installations: wall-mounting, pole-mounting, aerial, and ground-burial.



Feature


- Water tightness: IP 68
- The product is small in size and occupies small space.
- The base can be replaced with a mechanical one
- **optional** Splice tray can accommodate mini 1:8 PLC .
- Flame retardant, UV resistant materials can be customized according to customer requirements.



Specification

ETL Model No.	ETL-FOSC-48c-H		
Type	Dome		
Dimensions(mm)	325 × Φ225		
Weight (kg)	2.8		
Material	PP+GF		
Sealing Type	Heat shrink Seal		
Protection Grade	IP68		
Cable ports	Oval port	1	Φ8 - Φ18 mm
	Branch port	4	Φ8 - Φ18 mm
Closure Max Capacity	Single fiber splicing		72F
Splice Tray Capacity	6F (two layer)		12F (single layer)
Max No. tray installed	4pc (6pc optional)		
Installation	Aerial, wall, pole, underground, pipeline etc.		



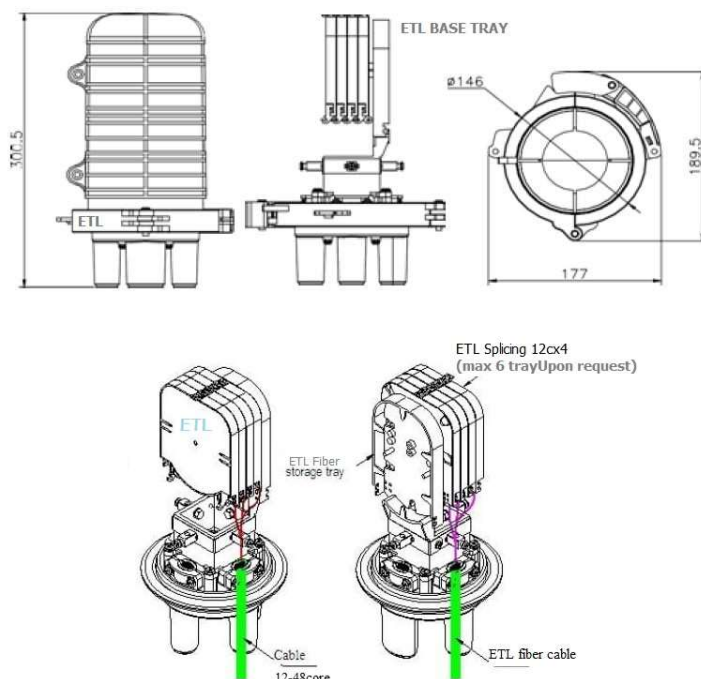

- ETL Standard accessories (Picture only for reference only)

Item	Description	Qty	Picture
1	Heat shrink tube for uncut port	1 pc	
2	Heat shrink tube for branch port	1 pc	
3	Branch clip	1 pc	
4	Aluminum paper	7 pcs	
5	Insulation tap	1 roll	
6	Splicing protective tube	1 bag	
7	Nylon cable tie	1 bag	
8	Sand paper	1 pc	
9	Installation manual	1 set	Book
10	EVA tube	1 roll	
11	Clean paper	1 pc	

